

# DRESS UP 1MT 24V

Foglio 1 di 4

**TIPO APPARECCHIO**

**UTILITY**



## CARATTERISTICHE GENERALI

Grado di protezione	<b>IP20</b>
Applicazione	ARMADIO
Cornice	0
Recesso	0 mm
Foratura	Ø 0 mm
Peso	500 gr
Fissaggio	VITI
Orientabile	No
Flessibile	Si
Interruttore	No

## MATERIALI

CORPO	ALLUMINIO
DIFFUSORE	POLICARBONATO

## SPECIFICHE ELETTRICHE

<b>TIPO ALIMENTAZIONE</b>	<b>Tensione Costante</b>		
Sorgente Luminosa	60 LED		
Tipo Apparecchio	Monocolore		
Alimentazione	24 Vdc		
Potenza	4.8 W		
Assorbimento	0.2 A		
Dimmerabile / Dimmer Consigliato	Si / FASP094CA2A3A00 HDIM300	Modalità dimmerazione	PWM

## DATI ILLUMINECNICI

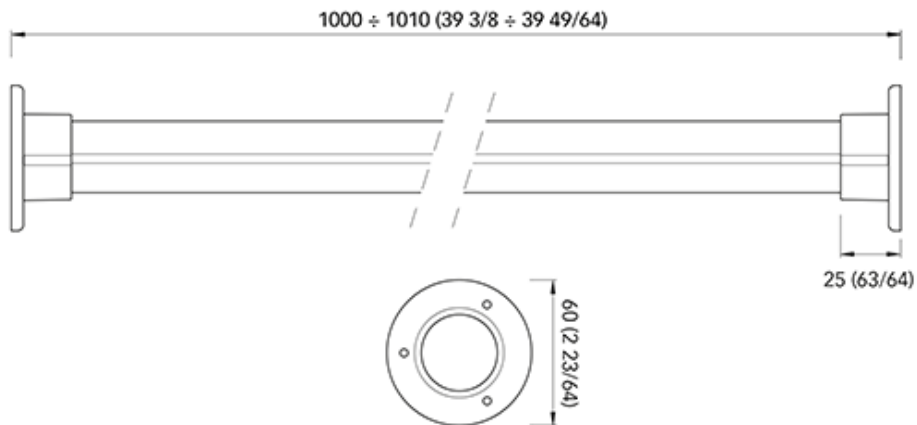
Temperatura Colore	<b>BIANCO CALDO</b> (2900-3100 °K)	<b>BIANCO NATURALE</b> (3800-4100 °K)	<b>BIANCO FREDDO</b> (5500-6000 °K)
<b>CRI</b>			
<b>Flusso luminoso</b>	<b>230 lm</b>	<b>300 lm</b>	
Efficienza			
Ø a 1 m			
Ø a 2 m			
Ø a 3 m			
<b>ANGOLO APERTURA</b>			

**CERTIFICAZIONI**



**TIPO APPARECCHIO****UTILITY****SPECIFICHE PER IL COLLEGAMENTO DEL SINGOLO APPARECCHIO****POTENZA: 4.8 W****ALIMENTAZIONE: 24 Vdc****ASSORBIMENTO: 0.2 A**

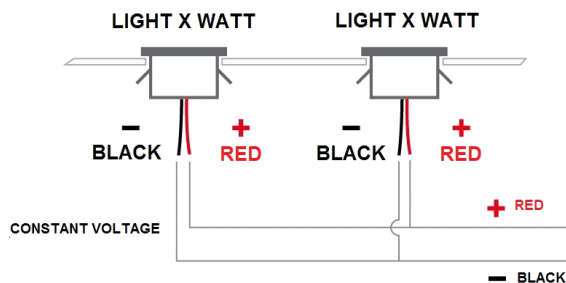
Dimensioni in mm (inches)

**INDICAZIONI PER IL COLLEGAMENTO****AVVERTENZE**

Utilizzare l'apparecchio in bassissima tensione (SELV) **Non collegare l'apparecchio direttamente alla corrente di rete (AC).**

**INDICAZIONI GENERALI PER COLLEGARE PIU' DI UN APPARECCHIO**

Questo prodotto si può collegare in parallelo

**INDICAZIONI PER IL MONTAGGIO**

# DRESS UP 1MT 24V

**CATEGORY**

**UTILITY LIGHT**



**GENERAL FEATURES**

IP Protection grade	<b>IP20</b>
Installation on	CLOSET
Molding	0
Recess	0 mm
Mounting hole	Ø 0 mm
Weight	500 gr
Fixing system	SCREWS
Orientable	No
Flexible	Yes
Switch	No

**MATERIALS**

BODY	ALUMINIUM
DIFFUSER	POLYCARBONATE

**ELECTRICAL SPECIFICATIONS**

<b>TYPE OF POWER</b>	<b>Constant Voltage</b>		
Light source	60 LED		
Light Type	One Color		
Power supply	24 Vdc		
Power consumption	4.8 W		
Absorption	0.2 A		
Dimmable / Recommended dimmer	Yes / FASP094CA2A3A00 HDIM300	Dimmer mode	PWM

**PHOTOMETRIC DATA**

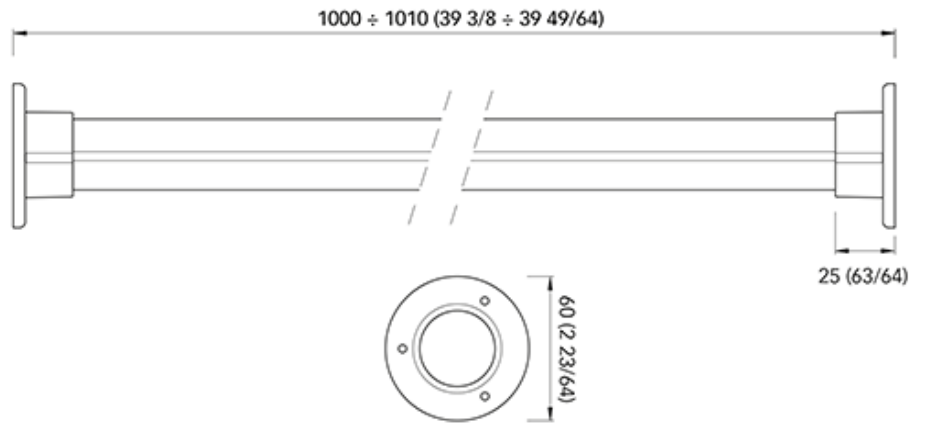
Color Temperature	<b>WARM WHITE</b> (2900-3100 °K)	<b>DAY LIGHT</b> (3800-4100 °K)	<b>COOL WHITE</b> (5500-6000 °K)
<b>CRI</b>			
<b>Luminous flux</b>	<b>230 lm</b>	<b>300 lm</b>	
Luminous efficacy			
<b>Ø at 1 m</b>			
<b>Ø at 2 m</b>			
<b>Ø at 3 m</b>			
<b>ANGLE</b>			

**CERTIFICATIONS**



**CATEGORY****UTILITY LIGHT****SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT****POWER: 4.8 W****POWER SUPPLY: 24 Vdc****OPERATING VOLTAGE**

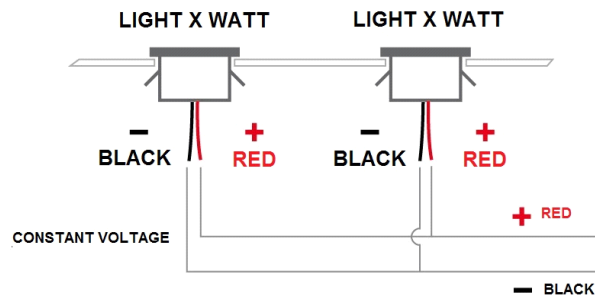
Dimensions - mm (inches)

**CONNECTION INFORMATION****WARNINGS**

Use the unit in ultra-low voltage (SELV) .  
**Do not plug the unit directly into the wall socket (AC).**

**GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE**

This product can be connected in parallel

**INSTRUCTIONS FOR ASSEMBLY**