



Hella marine
Vision and Innovation



Product News

Latest additions to the Hella marine range



LED Sea Hawk-XLR

18w 1300 Lumen

Next level technology offering incredible intensity

New !
1300 lumen
Sea Hawk XLR
LED Floodlights

Our brightest Sea Hawk to date !

1300 lumens of crisp, white, darkness-busting illumination with all the proven Sea Hawk durability and efficiency advantages.

Engineered light patterns

Advanced optical systems deliver incredible illumination without glare. Spread lamps illuminate a wide, close-range spread over a cockpit, foredeck or working area. Spot lamps provide a narrower, more concentrated illumination for tuna towers, yacht masts or for forward facing lighting on a variety of applications.

Unique Corrosion Proof Housing

Rather than cast and machined from aluminium then protective coated, Sea Hawk XLR housings are precision injection moulded from thermally conductive ceramic polymer. This advanced material draws heat from internal electronics for reliable long-term operation and eliminates the need for an aluminium housing in this class of floodlight, removing corrosion risks in the harsh marine environment.

Integrated Dimming

High/low light intensity functions are standard with every lamp. .

Multivolt 9-33V DC


Advanced electronics ensure reliable illumination and lamp protection even under severe voltage fluctuations and low battery voltages.

Pre-wired with marine cable


High quality sealed cable assemblies for time saving, completely sealed installations.

Designed and manufactured in New Zealand

Sea Hawk lamps carry a 5 year warranty.




Friction mounts allow adjustment without tools.





Two-Step high/low intensity options.



Completely sealed lamp and cable entry. Polished 316 stainless steel bracket.

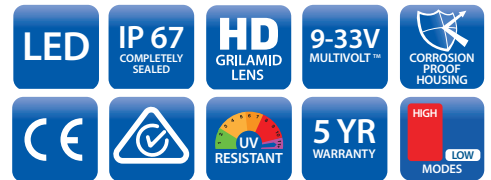

Sea Hawk XLR Candela and Lux performance. Spread.


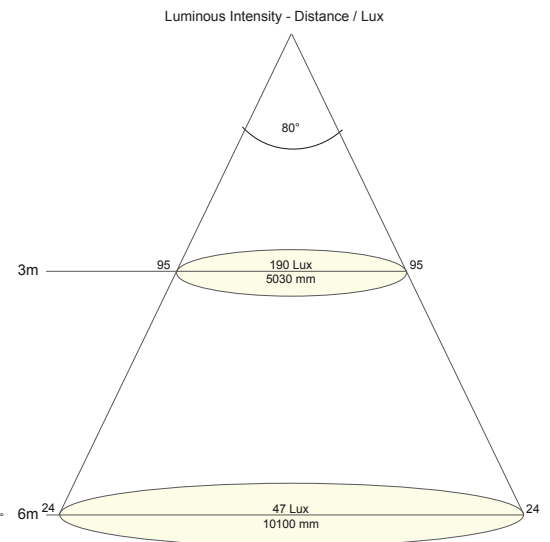
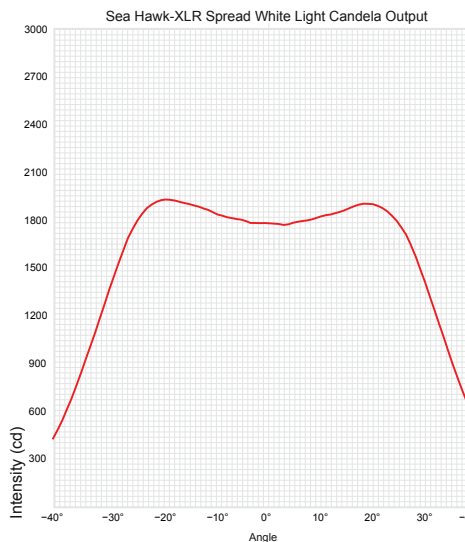


Hella marine Sea Hawk XLR series.



Packaging for
aftermarket presentation

Material Description	'Non metal' Thermally conductive polymer housing Heavy duty Grilamid lens
Bracket	Polished 316 stainless steel
Colour Temperature	5000K (White)
Cable	Pre-wired with 0.5m of triple core marine cable
Operating Voltage	Multivolt 9-33V DC
Degree of Protection	IP 67 - Completely Sealed
Power Consumption	High Intensity Mode 18W (1.5A@12V / 0.75A@24V) Low Intensity Mode 2W (0.17A@12V / 0.08A@24V)
Weight	450g (including cable)
Light Output	1300 lumens
Approvals	CE, RCM

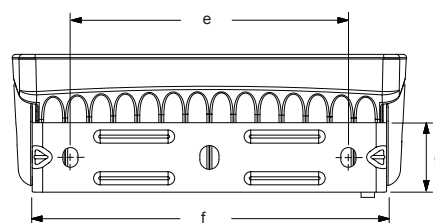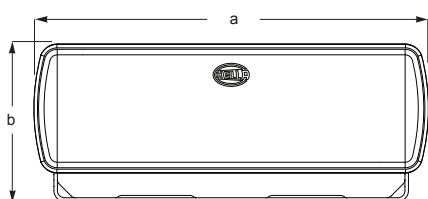

Dimensions

a =	170mm / 6.69"
b =	68mm / 2.68"
c =	58mm / 2.28"
d =	55mm / 2.17"
e =	120mm / 4.72"
f =	154mm / 6.06"
g =	30mm / 1.18"

0950 Series Bracket Mount

LED
Multivolt

White Light LED Floodlights - Spread

Voltage	Housing Colour	Part Number
9-33V DC	Black Housing	2LT 980 740-001
9-33V DC	White Housing	2LT 980 740-011

Spread pattern Applications;

Cockpit
Foredeck
Working areas



0950 Series Bracket Mount

LED
Multivolt

White Light LED Deck Lamps - Spot

Voltage	Housing Colour	Part Number
9-33V DC	Black Housing	2LT 980 740-201
9-33V DC	White Housing	2LT 980 740-211

Spot pattern Applications;

Low speed docking
Forward facing to illuminate objects in the water
Spreader lamps on yacht masts

