

STRIP LED 1M 24V

Foglio 1 di 4

TIPO APPARECCHIO

STRISCE LED



CARATTERISTICHE GENERALI

| MATERIALI

Grado di protezione **IP65**

CORPO

SILICONE

Applicazione SOFFITTO-PARETE-TERRA

Dimensioni 4 x 10.5 mm

Recesso 0 mm

Foratura Ø 12 mm

Peso 50 gr

Fissaggio CLIP+VITI

Orientabile No

Flessibile Si

Interruttore No

SPECIFICHE ELETTRICHE

TIPO ALIMENTAZIONE

Tensione Costante

Sorgente Luminosa 60 LED

Tipo Apparecchio

Alimentazione 24 Vdc

Potenza 4.8 W

Assorbimento 0.2 A

Dimmerabile / Dimmer Consigliato Si / FASP094CA2A3D00 HDIM300 D00

Modalità dimmerazione PWM

DATI ILLUMINECNICI

Temperatura Colore

BIANCO CALDO

BIANCO NATURALE

BIANCO FREDDO

(2900-3100 °K)

(3800-4100 °K)

(5500-6000 °K)

CRI

Flusso luminoso

Efficienza

Ø a 1 m

Ø a 2 m

Ø a 3 m

ANGOLO APERTURA

CERTIFICAZIONI




TIPO APPARECCHIO**STRISCE LED****SPECIFICHE PER IL COLLEGAMENTO DEL SINGOLO APPARECCHIO**

POTENZA: 4.8 W

ALIMENTAZIONE: 24 Vdc

ASSORBIMENTO: 0.2 A


Dimensioni in mm (inches)

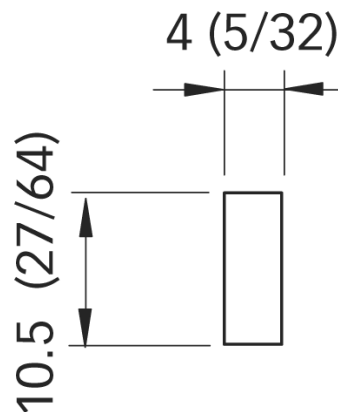**INDICAZIONI PER IL COLLEGAMENTO****AVVERTENZE**

Utilizzare l'apparecchio in bassissima tensione (SELV) **Non collegare l'apparecchio direttamente alla corrente di rete (AC).**

INDICAZIONI GENERALI PER COLLEGARE PIU' DI UN APPARECCHIO

Questo prodotto si può collegare in parallelo

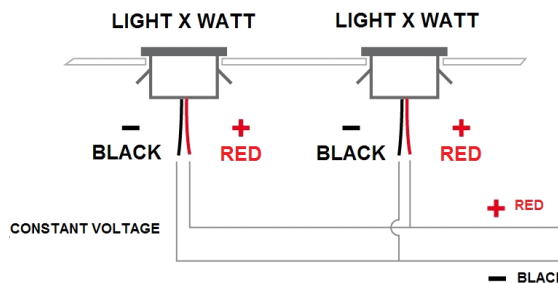
**INDICAZIONI PER IL MONTAGGIO**

Strip LED è fornita completa di clips per il montaggio.

STRIP LED 1M 24V

CATEGORY

STRIP LIGHTS

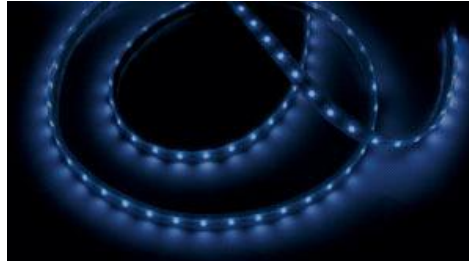

GENERAL FEATURES

MATERIALS

IP Protection grade	IP65	BODY	SILICONE
Installation on	CEILING-WALL-FLOOR		
Dimensions	4 x 10.5 mm		
Recess	0 mm		
Mounting hole	Ø 12 mm		
Weight	50 gr		
Fixing system	BRACKET+SCREWS		
Orientable	No		
Flexible	Yes		
Switch	No		

ELECTRICAL SPECIFICATIONS

TYPE OF POWER	Constant Voltage		
Light source	60 LED		
Light Type			
Power supply	24 Vdc		
Power consumption	4.8 W		
Absorption	0.2 A		
Dimmable / Recommended dimmer	Yes / FASP094CA2A3D00 HDIM300 D00	Dimmer mode	PWM

PHOTOMETRIC DATA

Color Temperature	WARM WHITE (2900-3100 °K)	DAY LIGHT (3800-4100 °K)	COOL WHITE (5500-6000 °K)
CRI			
Luminous flux			
Luminous efficacy			
Ø at 1 m			
Ø at 2 m			
Ø at 3 m			
ANGLE			

CERTIFICATIONS



CATEGORY

STRIP LIGHTS


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

POWER: 4.8 W

POWER SUPPLY: 24 Vdc

OPERATING VOLTAGE

Dimensions - mm (inches)

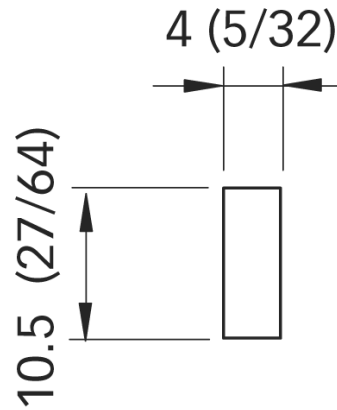


CONNECTION INFORMATION

WARNINGS

Use the unit in ultra-low voltage (SELV) .
Do not plug the unit directly into the wall socket (AC).

GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE

This product can be connected in parallel

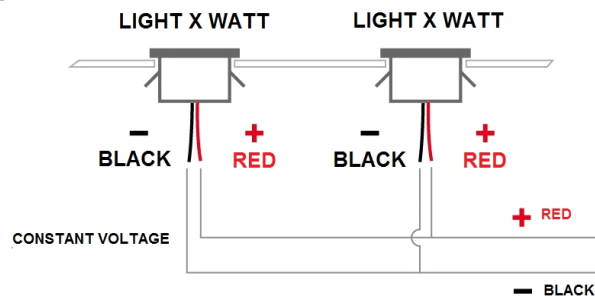

INSTRUCTIONS FOR ASSEMBLY



LED strip is supplied complete with mounting clips.