

# MARINE PRODUCT DATA SHEET

**OEM:** 359-101-30 (Bilge Switch)  
**AFTERMARKET:** 359-111-30 (Bilge Switch)

## APPLICATION

Bilge water evacuation in conjunction with Bilge Pump

## MATERIAL:

Housing: ABS  
Switch Type: Mechanical  
Leads: 3' Tinned wire

## SPECIFICATIONS

Voltage: 12/24V DC  
Max-Amps: 12 amps at 12V, 6 amps at 24V  
Temp: 33°F to 180°F  
Operation: Activates at 1-3/4". Turns Off at 3/4"

## APPROVALS

Ignition Protected 8846, CE

## SHIPPING

Approx. Net Weight: 0.4Lbs [0.18 Kg] each  
Approx. Carton Weight: 10 Lbs. [4.5 Kg]  
Switches in Carton: 24  
Approx. Carton Size: 23"L x 17"W x 18" H  
[58cm x 43cm x 20cm]


## RELATED DOCUMENTS

Catalog: MS-030-140  
Applications Spec Guide: MS-020-005  
Installation Manual: 911-1004  
Aftermarket Warranty: 911-1045



The SHURflo Series float switches provide the ultimate in reliability for your boat. Complete line includes a solid state control, mechanical, standard float switch and protected cage switch.

No Parts Kits Available

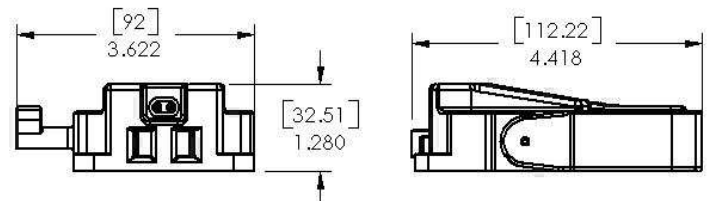

## **WATER PURIFICATION**

3545 Harbor Gateway South, Suite 103, Costa Mesa, CA 92626, (800) 854-3218 [www.SHURFLO.com](http://www.SHURFLO.com)

All Pentair trademarks and logos are owned by Pentair, Inc. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.