

PRO Mini

Small Power Boats and Sailboats
(35 - 45 feet / 9 - 14 meters)



Great Things Come in Small Packages

Production Capacity:

170, 350, 550, and 750 Gallons/Day

The low-hassle Pro Mini is engineered to fit anywhere. Measuring about 2 - 3 cubic feet, sail and small power boaters have the opportunity and the convenience of a Sea Recovery watermaker without space restrictions. Featuring a simple interface, the Pro Mini can be monitored via the control panel or remote (optional). The Pro Mini can produce up to 7, 15, 23, or 31 gallons of fresh water per hour and is the perfect seaworthy companion for the solo cruiser.



Contact Information:

Parker Hannifin Corporation
Water Purification
2630 E. El Presidio Street
Carson, CA 90810

phone 310 608 5600
fax 310 608 5692
waterpurification@parker.com

Website:
www.parker.com/waterpurification

Sales:
waterpurification@parker.com

Tech Support:
watertech@parker.com

Features & Benefits:

- Smallest Line of Watermaker
- Easy Access to Main Components
- Low AC Power Consumption
- Maximum Capacity System Weight Is 150 LBS
- Semi-Automatic Operation
- Automatic Fresh Water Flush



ENGINEERING YOUR SUCCESS.

Specifications

| Model | Production / Hr. | Production / 24 Hrs. | Weight - Compact | Weight - Modular |
|---------------------|------------------|----------------------|------------------|------------------|
| PRO Mini 170 | 7 gal / 27 L | 170 gal / 644 L | 70 lbs / 32 kg | 70 lbs / 32 kg |
| PRO Mini 350 | 15 gal / 55 L | 350 gal / 1,325 L | 127 lbs / 58 kg | 89 lbs / 40 kg |
| PRO Mini 550 | 23 gal / 87 L | 550 gal / 2,080 L | 142 lbs / 64 kg | 128 lbs / 57 kg |
| PRO Mini 750 | 31 gal / 117 L | 750 gal / 2,839 L | 150 lbs / 68 kg | 130 lbs / 59 kg |


Electrical Motor Specifications

PRO MINI 170


| Electrical | Phase | Pump Motor | Voltage | Hz | H.P. | Running Amps | Start Up Amps |
|-------------------------|--------|------------|------------------|----------|-----------|--------------------|---------------|
| Mini 170 | N/A | HP | 12 / 24 | N/A | 0.33 | 27/13.4 | 90/45 |
| Mini 170 | Single | HP | 110 / 230 | 50 // 60 | 0.33 | 6.6/3.3//5.2/2.6 | 26/13 |
| Mini 350 | Single | HP | 110 / 230 | 60 | 1 | 12.8/6.4 | 39/20 |
| Mini 350 | Single | HP | 110 / 230 | 50 | 1 | 12.4/6.2 | 37/19 |
| Mini 550 / 750 | Single | HP | 110/220//115/230 | 50/60 | 1.75//2.1 | 18.9/9.4//18.2/9.1 | 57/28 |
| Mini 350/550/750 | Single | Booster | 110 / 220 | 50/60 | 0.5 | 9.4/4.7-7.4/3.7 | 28/14 |

Dimensions


COMPACT 170, 350, 550, and 750

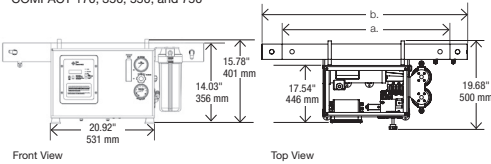


Front View
Top View
a. PRO Mini 350 & 550: 37.94" / 964 mm | b. PRO Mini 750: 46.94" / 1192 mm

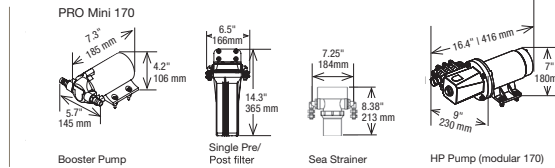

PRO Mini 350-750

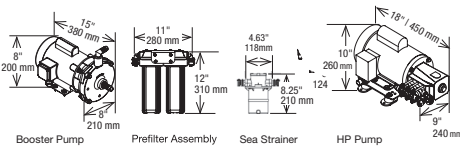

MODULAR 170, 350, 550 and 750

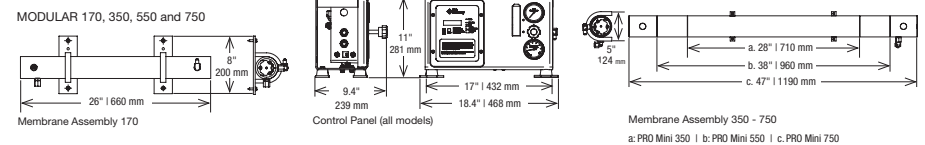

Duration Maintenance Kits

| Product Family | Initial Load Out | 3 Months (200 hrs.) | 6 Months (500 hrs.) | 12 Months (1000 hrs.) | 24 Months (2000 hrs.) |
|---|------------------|---------------------|---------------------|-----------------------|-----------------------|
| PRO Mini (Standard Prefilters) | 61012086 | 61012087 | 61012088 | 61012089 | 61012090 |
| PRO Mini 350 (Commercial Prefilter/ Oil Water Separator) | 61012111 | 61012112 | 61012113 | 61012114 | 61012115 |
| PRO Mini 170 (Standard Prefilters) | 61012091 | 61012092 | 61012093 | 61012094 | 61012095 |

To maintain peak performance, always use genuine Parker Village Marine replacement parts. We reserve the right to change our specifications or standards without notice.

WARNING: This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the state of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

